




A ISO ME 5

BRIDA DELANTERA
FRONT FLANGE

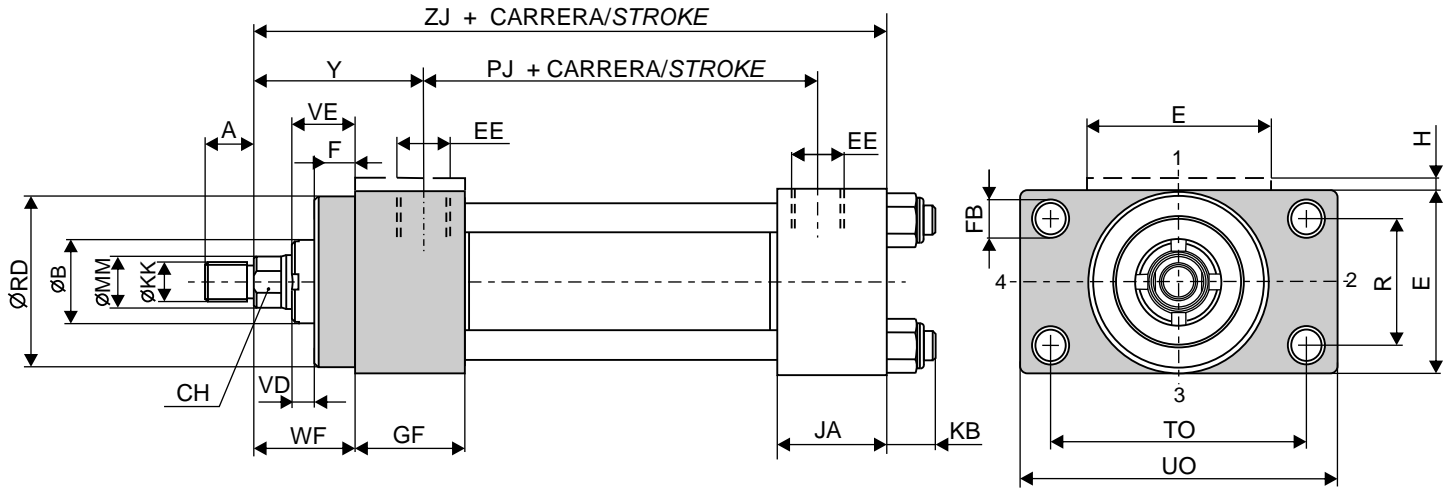

Posición regulador amortiguación, lado 3. Location of cushioning-screws, side3

Pistón Bore	25		32		40		50		63		80		100		125		160		200	
MM	12	18	14	22	18	28	22	36	28	45	36	56	45	70	56	90	70	110	90	140
A h15	1	14	16	18	22	28	36	45	56	63	85	112	140	175	210	245	280	315	350	385
	2	18	22	28	36	45	56	63	85	112	140	175	210	245	280	315	350	385	420	455
B f9	24	30	26	34	30	42	34	50	42	60	50	72	60	88	72	108	88	133	108	163
CH	10	15	12	18	15	22	18	30	22	36	30	46	36	60	46	80	60	100	80	120
E	40	45	63	75	90	115	130	165	205	245										
EE	1/4"G	1/4"G	3/8 "G	1/2"G	1/2"G	3/4"G	3/4"G	1"G	1"G	1 1/4"G										
F	10	10	10	16	16	20	22	22	25	25										
FB H13	5,5	6,6	11	14	14	18	18	22	26	33										
GF	25	25	38	38	38	45	45	57	58	76										
H	5	5	-	-	-	-	-	-	-	-										
JA	25	31	47	45	45	54	57	58	58	76										
KB	7	8	10	14	14	19	19	25	32	35										
KK	1	M10x1,25	M12x1,25	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M64x3									
	2	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M64x3	M80x3	M100x3									
PJ ±1,25	53	56	73	74	80	93	101	117	130	165										
R js13	27	33	41	52	65	83	97	126	155	190										
RD f8	38	42	62	74	75	88	82	105	92	125	105	150	125	170	150	210				
TO js13	51	58	87	105	117	149	162	208	253	300										
UO	65	70	110	130	145	180	200	250	300	360										
VD	6	12	12	9	13	9	10	10	7	7										
VE	16	22	22	25	29	29	32	32	32	32										
WF ±2	25	35	35	41	48	51	57	57	57	57										
Y ±2	50	60	62	67	71	77	82	86	86	98										
ZJ ±1	114	128	153	159	168	190	203	232	245	299										

CILCOIL,S.A.- Se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.
CILCOIL,S.A.- Reserves the rights to modify: Techniques, materials,dimensions and shapes without prior notice.