




U ISO MP 3

CHARNELA MACHO
EYE MOUNTING

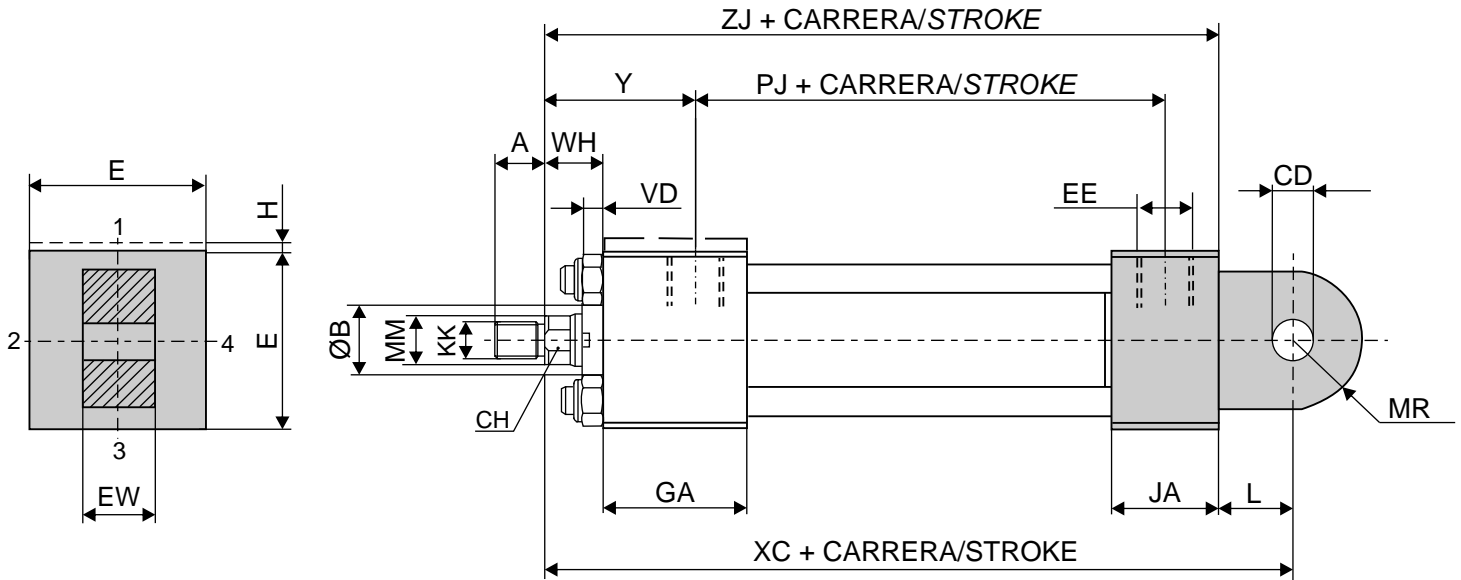

Posición regulador amortiguación, lado 3. Location of cushioning-screws, side3

Pistón Bore	25		32		40		50		63		80		100		125		160		200		
	MM																				
A h15	1	14	16	18	22	28	36	45	56	63	85										
	2	18	22	28	36	45	56	63	85	95	112										
B f9		24	30	26	34	30	42	34	50	42	60	50	72	60	88	72	108	88	133	108	163
CD		10	12	14	20	20	28	36	45	56	70										
CH		10	15	12	18	15	22	18	30	22	36	30	46	36	60	46	80	60	100	80	120
E		40	45	63	75	90	115	130	165	205	245										
EE		1/4"G	1/4"G	3/8 "G	1/2"G	1/2"G	3/4"G	3/4"G	1"G	1"G	1 1/4"G										
EW		12	16	20	30	30	40	50	60	70	80										
GA		50	50	55	61	61	70	72	80	83	101										
H		5	5	-	-	-	-	-	-	-	-										
JA		25	31	47	45	45	54	57	58	58	76										
KK	1	M10x1,25	M12x1,25	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M64x3										
	2	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M64x3	M80x3	M100x3										
L		13	19	19	32	32	39	54	57	63	82										
MR		12	17	17	29	29	34	44	53	59	78										
PJ ±1,25		53	56	73	74	80	93	101	117	130	165										
VD		6	12	12	9	13	9	10	10	7	7										
WH		15	25	25	25	32	31	35	35	32	32										
XC		127	147	172	191	200	229	257	289	308	381										
Y ±2		50	60	62	67	71	77	82	86	86	98										
ZJ ±1		114	128	153	159	168	190	203	232	245	299										

CILCOIL,S.A.- Se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.
CILCOIL,S.A.- Reserves the rights to modify: Techniques, materials,dimensions and shapes without prior notice.