




**CHARNELA RÓTULA**  
**BALL JOINTED EYE**

**D** ISO MP 5

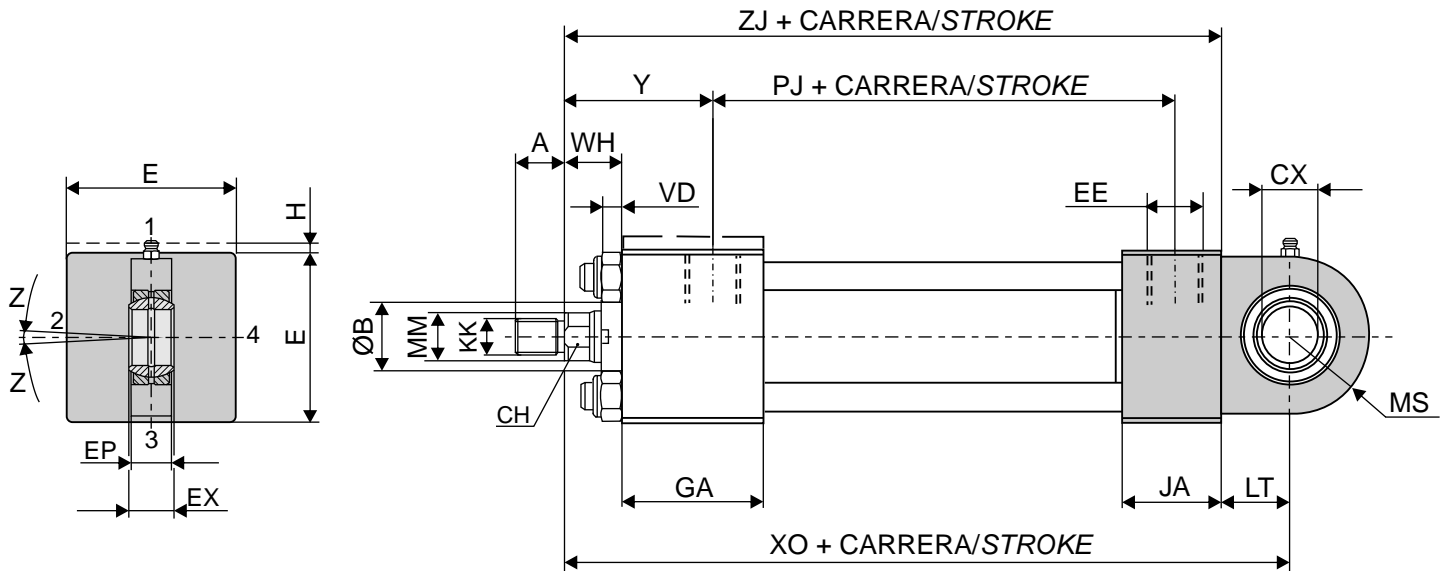

Posición regulador amortiguación, lado 3. Location of cushioning-screws, side3

Pistón Bore	25		32		40		50		63		80		100		125		160		200		
	MM	12	18	14	22	18	28	22	36	28	45	36	56	45	70	56	90	70	110	90	140
A h15	1	14		16		18		22		28		36		45		56		63		85	
	2	18		22		28		36		45		56		63		85		95		112	
B f9		24	30	26	34	30	42	34	50	42	60	50	72	60	88	72	108	88	133	108	163
CH		10	15	12	18	15	22	18	30	22	36	30	46	36	60	46	80	60	100	80	120
CX		12		16		20		25		30		40		50		60		80		100	
E		40		45		63		75		90		115		130		165		205		245	
EE		1/4"G		1/4"G		3/8 "G		1/2"G		1/2"G		3/4"G		3/4"G		1"G		1"G		1 1/4"G	
EP H15		8		11		13		17		19		23		30		38		47		57	
EX		10		14		16		20		22		28		35		44		55		70	
GA		50		50		55		61		61		70		72		80		83		101	
H		5		5		-		-		-		-		-		-		-		-	
JA		25		31		47		45		45		54		57		58		58		76	
KK	1	M10x1,25		M12x1,25		M14x1,5		M16x1,5		M20x1,5		M27x2		M33x2		M42x2		M48x2		M64x3	
	2	M14x1,5		M16x1,5		M20x1,5		M27x2		M33x2		M42x2		M48x2		M64x3		M80x3		M100x3	
LT		16		20		25		31		38		48		58		72		92		116	
MS		20		22,5		29		33		40		50		62		80		100		120	
PJ ±1,25		53		56		73		74		80		93		101		117		130		165	
VD		6		12		12		9		13		9		10		10		7		7	
WH		15		25		25		25		32		31		35		35		32		32	
XO		130		148		178		190		206		238		261		304		337		415	
Y ±2		50		60		62		67		71		77		82		86		86		98	
Z		4°		4°		4°		4°		4°		4°		4°		4°		4°		4°	
ZJ ±1		114		128		153		159		168		190		203		232		245		299	

CILCOIL,S.A.- Se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.  
CILCOIL,S.A.- Reserves the rights to modify: Techniques, materials,dimensions and shapes without prior notice.