




**G** ISO MT 1

**MUÑÓN DELANTERO**  
FRONT TRUNNIONS

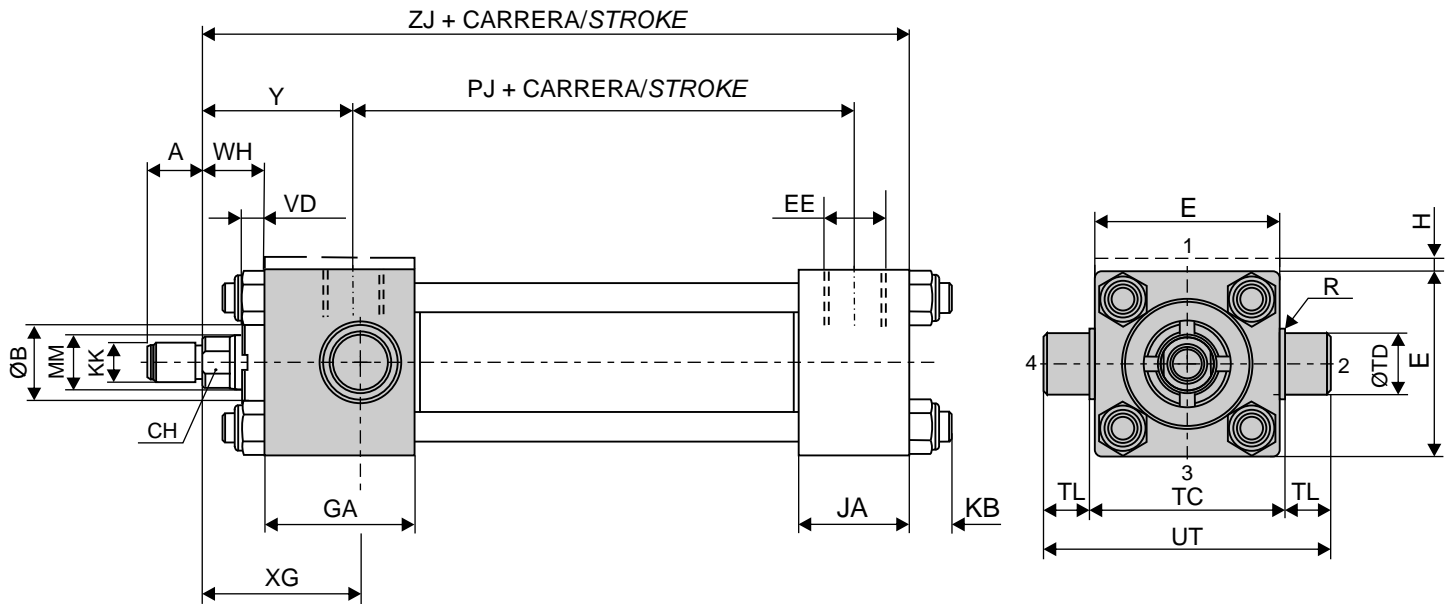

Posición regulador amortiguación, lado 3. Location of cushioning-screws, side3

| Pistón Bore | 25    |          | 32       |         | 40      |         | 50    |       | 63    |         | 80      |         | 100     |         | 125     |        | 160    |         | 200     |         |
|-------------|-------|----------|----------|---------|---------|---------|-------|-------|-------|---------|---------|---------|---------|---------|---------|--------|--------|---------|---------|---------|
| MM          | 12    | 18       | 14       | 22      | 18      | 28      | 22    | 36    | 28    | 45      | 36      | 56      | 45      | 70      | 56      | 90     | 70     | 110     | 90      | 140     |
| A h15       | 1     | 14       | 16       | 18      | 22      | 28      | 36    | 45    | 56    | 63      | 85      | 112     | 140     | 165     | 205     | 245    | 299    | 353     | 407     | 461     |
|             | 2     | 18       | 22       | 28      | 36      | 45      | 56    | 63    | 85    | 95      | 112     | 140     | 165     | 205     | 245     | 299    | 353    | 407     | 461     | 515     |
| B f9        | 24    | 30       | 26       | 34      | 30      | 42      | 34    | 50    | 42    | 60      | 50      | 72      | 60      | 88      | 72      | 108    | 88     | 133     | 108     | 163     |
| CH          | 10    | 15       | 12       | 18      | 15      | 22      | 18    | 30    | 22    | 36      | 30      | 46      | 36      | 60      | 46      | 80     | 60     | 100     | 80      | 120     |
| E           | 40    | 45       | 63       | 75      | 90      | 115     | 130   | 165   | 205   | 245     | 299     | 353     | 407     | 461     | 515     | 569    | 623    | 677     | 731     | 785     |
| EE          | 1/4"G | 1/4"G    | 3/8 "G   | 1/2"G   | 1/2"G   | 3/4"G   | 3/4"G | 1"G   | 1"G   | 1 1/4"G | 1 1/4"G | 1 1/2"G | 1 1/2"G | 1 3/4"G | 1 3/4"G | 2"G    | 2"G    | 2 1/4"G | 2 1/4"G | 2 1/2"G |
| GA          | 50    | 50       | 55       | 61      | 61      | 70      | 72    | 80    | 88    | 108     | 108     | 120     | 130     | 140     | 150     | 160    | 170    | 180     | 190     | 200     |
| H           | 5     | 5        | -        | -       | -       | -       | -     | -     | -     | -       | -       | -       | -       | -       | -       | -      | -      | -       | -       | -       |
| JA          | 25    | 31       | 47       | 45      | 45      | 54      | 57    | 58    | 58    | 76      | 76      | 85      | 85      | 94      | 94      | 103    | 103    | 112     | 112     | 121     |
| KB          | 7     | 8        | 10       | 14      | 14      | 19      | 19    | 25    | 32    | 35      | 35      | 40      | 40      | 45      | 45      | 50     | 50     | 55      | 55      | 60      |
| KK          | 1     | M10x1,25 | M12x1,25 | M14x1,5 | M16x1,5 | M20x1,5 | M27x2 | M33x2 | M42x2 | M48x2   | M64x3   | M80x3   | M100x3  | M125x3  | M150x3  | M175x3 | M200x3 | M250x3  | M300x3  | M350x3  |
|             | 2     | M14x1,5  | M16x1,5  | M20x1,5 | M27x2   | M33x2   | M42x2 | M48x2 | M64x3 | M80x3   | M100x3  | M125x3  | M150x3  | M175x3  | M200x3  | M250x3 | M300x3 | M350x3  | M400x3  | M450x3  |
| PJ ±1,25    | 53    | 56       | 73       | 74      | 80      | 93      | 101   | 117   | 130   | 165     | 165     | 181     | 207     | 220     | 255     | 268    | 293    | 328     | 341     | 376     |
| R           | 1     | 1        | 1        | 2       | 2       | 2       | 2     | 2     | 2     | 2       | 2       | 2       | 2       | 2       | 2       | 2      | 2      | 2       | 2       | 2       |
| TC          | 38    | 44       | 63       | 76      | 89      | 114     | 127   | 165   | 203   | 241     | 241     | 279     | 317     | 355     | 393     | 431    | 469    | 507     | 545     | 583     |
| TD f8       | 12    | 16       | 20       | 25      | 32      | 40      | 50    | 63    | 80    | 100     | 100     | 116     | 132     | 148     | 164     | 180    | 196    | 212     | 228     | 244     |
| TL          | 10    | 12       | 16       | 20      | 25      | 32      | 40    | 50    | 63    | 80      | 80      | 96      | 112     | 128     | 144     | 160    | 176    | 192     | 208     | 224     |
| UT          | 58    | 68       | 95       | 116     | 139     | 178     | 207   | 265   | 329   | 401     | 401     | 469     | 537     | 605     | 673     | 741    | 809    | 877     | 945     | 1013    |
| VD          | 6     | 12       | 12       | 9       | 13      | 9       | 10    | 10    | 7     | 7       | 7       | 7       | 7       | 7       | 7       | 7      | 7      | 7       | 7       | 7       |
| WH          | 15    | 25       | 25       | 25      | 32      | 31      | 35    | 35    | 32    | 32      | 32      | 35      | 35      | 35      | 35      | 35     | 35     | 35      | 35      | 35      |
| XG          | 44    | 54       | 57       | 64      | 70      | 76      | 71    | 75    | 75    | 85      | 85      | 95      | 95      | 105     | 105     | 115    | 115    | 125     | 125     | 135     |
| Y ±2        | 50    | 60       | 62       | 67      | 71      | 77      | 82    | 86    | 86    | 98      | 98      | 108     | 108     | 118     | 118     | 128    | 128    | 138     | 138     | 148     |
| ZJ ±1       | 114   | 128      | 153      | 159     | 168     | 190     | 203   | 232   | 245   | 299     | 299     | 337     | 350     | 389     | 402     | 441    | 454    | 493     | 506     | 545     |

CILCOIL, S.A.- Se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.  
CILCOIL, S.A.- Reserves the rights to modify: Techniques, materials, dimensions and shapes without prior notice.