




E ISO MS 2

PATAS
FEET

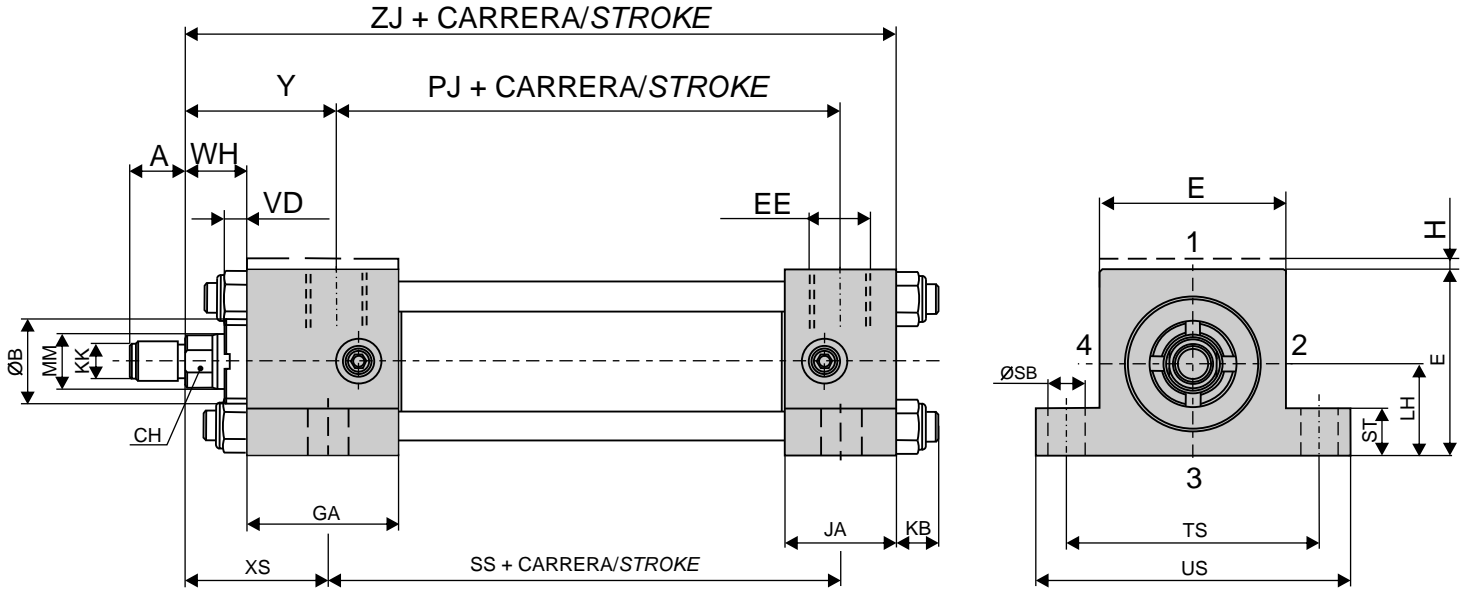

Posición regulador amortiguación, lado 4. Location of cushioning-screws, side 4

Pistón Bore	25		32		40		50		63		80		100		125		160		200	
MM	12	18	14	22	18	28	22	36	28	45	36	56	45	70	56	90	70	110	90	140
A h15	1	14	16	18	22	28	36	45	56	63	85	95	112	125	160	200	245	299		
	2	18	22	28	36	45	56	63	85	95	112	125	160	200	245	299				
B f9	24	30	26	34	30	42	34	50	42	60	50	72	60	88	72	108	88	133	108	163
CH	10	15	12	18	15	22	18	30	22	36	30	46	36	60	46	80	60	100	80	120
E	40	45	63	75	90	115	130	165	205	245										
EE	1/4"G	1/4"G	3/8 "G	1/2"G	1/2"G	3/4"G	3/4"G	1"G	1"G	1 1/4"G										
GA	50	50	55	61	61	70	72	80	83	101										
H	5	5	-	-	-	-	-	-	-	-										
JA	25	31	47	45	45	54	57	58	58	76										
KB	7	8	10	14	14	19	19	25	32	35										
KK	1	M10x1,25	M12x1,25	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M64x3									
	2	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M64x3	M80x3	M100x3									
LH	19	22	31	37	44	57	63	82	101	122										
PJ ±1,25	53	56	73	74	80	93	101	117	130	165										
SB	6,6	9	11	14	18	18	26	26	33	39										
SS	73	73	98	92	86	105	102	131	130	172										
ST	8,5	12,5	12,5	19	26	26	32	32	38	44										
TS	54	63	83	102	124	149	172	210	260	311										
US	72	84	103	127	161	186	216	254	318	381										
VD	6	12	12	9	13	9	10	10	7	7										
WH	15	25	25	25	32	31	35	35	32	32										
XS	33	45	45	54	65	68	79	79	86	92										
Y ±2	50	60	62	67	71	77	82	86	86	98										
ZJ ±1	114	128	153	159	168	190	203	232	245	299										

CILCOIL,S.A.- Se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.
CILCOIL,S.A.- Reserves the rights to modify: Techniques, materials,dimensions and shapes without prior notice.