




R ISO MX 3

TIRANTES PROLONGADOS DELANTEROS
EXTENDED FRONT TIE-RODS

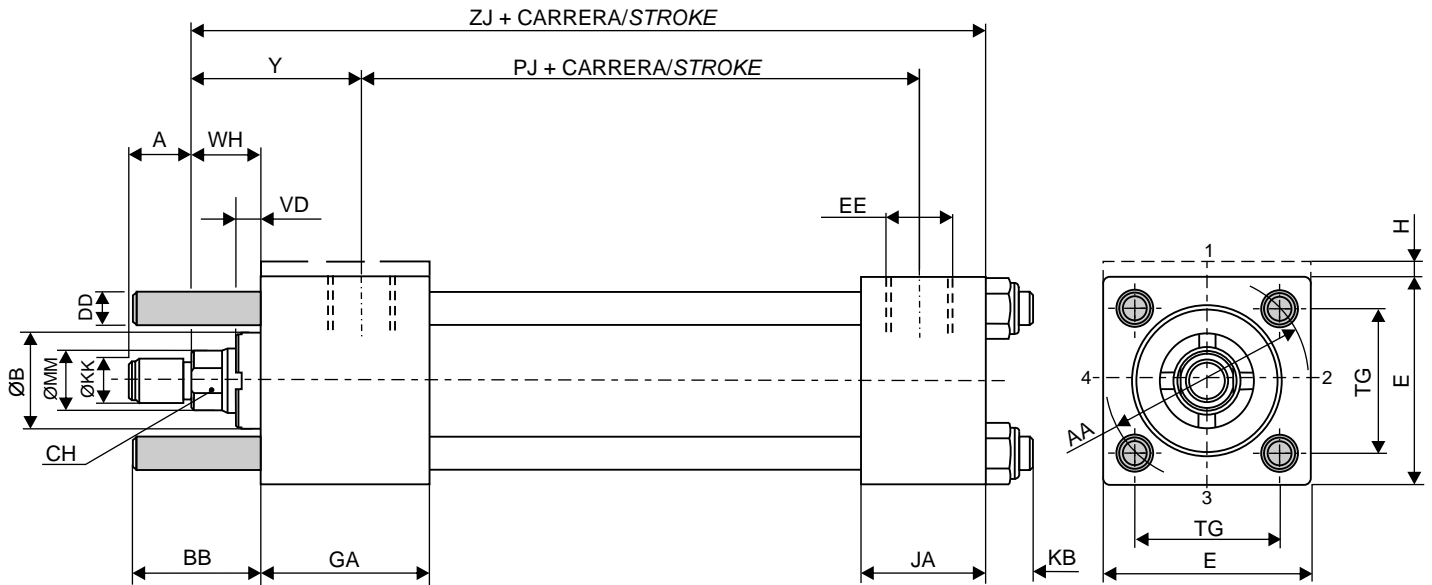

Posicion regulador amortiguacion, lado 3. Location of cushioning-screws, side 3.

Pistón Bore	25		32		40		50		63		80		100		125		160		200		
	MM																				
A h15	1	14	16	18	22	28	36	45	56	63	85	2	18	22	28	36	45	56	63	85	112
AA		40	47	59	74	91	117	137	178	219	269										
B f9		24	30	26	34	30	42	34	50	42	60	50	72	60	88	72	108	88	133	108	163
BB		19	24	35	46	46	59	59	81	92	115										
CH		10	15	12	18	15	22	18	30	22	36	30	46	36	60	46	80	60	100	80	120
DD		M5x0,8	M6x1	M8x1	M12x1,25	M12x1,25	M16x1,5	M16x1,5	M22x1,5	M27x2	M30x2										
E		40	45	63	75	90	115	130	165	205	245										
EE		1/4"G	1/4"G	3/8 "G	1/2"G	1/2"G	3/4"G	3/4"G	1"G	1"G	1 1/4"G										
GA		50	50	55	61	61	70	72	80	83	101										
H		5	5	-	-	-	-	-	-	-	-										
JA		25	31	47	45	45	54	57	58	58	76										
KB		7	8	10	14	14	19	19	25	32	35										
KK	1	M10x1,25	M12x1,25	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M64x3										
	2	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M64x3	M80x3	M100x3										
PJ ±1,25		53	56	73	74	80	93	101	117	130	165										
TG		28,3	33,2	41,7	52,3	64,3	82,7	96,9	125,9	154,9	190,2										
VD		6	12	12	9	13	9	10	10	7	7										
WH		15	25	25	25	32	31	35	35	32	32										
Y ±2		50	60	62	67	71	77	82	86	86	98										
ZJ ±1		114	128	153	159	168	190	203	232	245	299										

CILCOIL,S.A.- Se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.
CILCOIL,S.A.- Reserves the rights to modify: Techniques, materials,dimensions and shapes without prior notice.