




• TIPO - TYPE: **AS** •  
**Brida delantera - Front flange mounting**

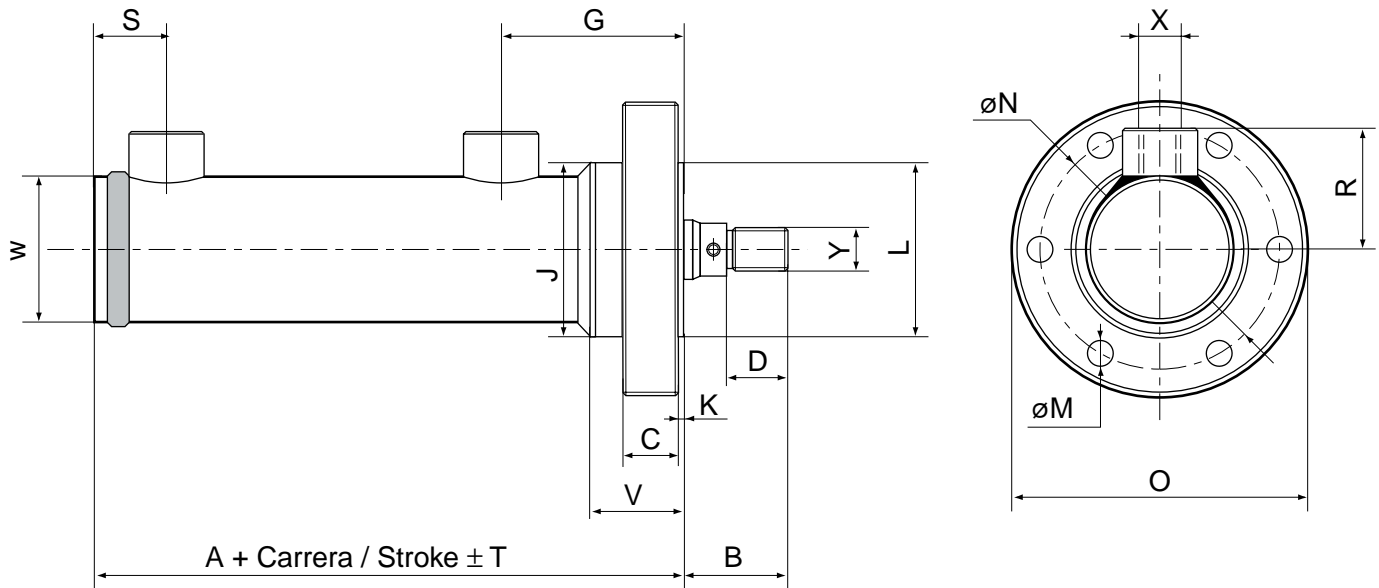

Nota: El cilindro serie: CS-250 lleva 12 taladros equidistantes (M) en vez de 6.

Note: The cylinder series: CS-250 carries 12 equidistant drills (M) instead of 6.

TIPO CS	X	Y	A	B	C	D	G	J	K	L	M	N	O	R	S	T	V	W
<b>CS-032</b> 016	1/4" G.	12 x 125	106	30	15	16	48	52	2	52	7	67	80	35	26	2	32	42
<b>CS-040</b> 022/028	3/8" G.	16 x 150	126	35	17	20	60	62	2	60	9	82	100	41	25	2	40	50
<b>CS-050</b> 028/036	3/8" G.	20 x 150	136	41	20	25	62	74	2	75	11	103	125	46	29	2	41	60
<b>CS-063</b> 036/045	1/2" G.	27 x 2	149	48	24	32	62	89	2	90	13	120	145	54	35	2	39	75
<b>CS-080</b> 045/056	1/2" G.	33 x 2	168	59	28	40	72	112	2	110	15	142	170	65	40	2	46	95
<b>CS-100</b> 056/070	3/4" G.	42 x 2	189	70	34	50	81	135	3	135	17	170	202	76	45	3	52	115
<b>CS-125</b> 070/090	3/4" G.	52 x 2	203	80	40	55	85	170	3	168	21	210	250	91	57	3	53	145
<b>CS-160</b> 090/110	1" G.	68 x 3	255	100	54	70	109	218	3	215	29	270	320	116	72	3	67	185
<b>CS-200</b> 110/140	1 1/4" G.	90 x 3	297	125	65	90	124	272	3	270	32	330	385	138	90	3	80	230
<b>CS-250</b> 140/180	1 1/4" G.	110 x 3	338	150	65	110	150	335	5	330	29	390	440	172	103	4	105	298

CILCOIL, S.A. - se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.

CILCOIL, S.A. - reserves the rights to modify: Techniques, materials, dimensions and shapes without prior notice.