




• TIPO - TYPE: **BS** •
Brida trasera - Rear flange mounting

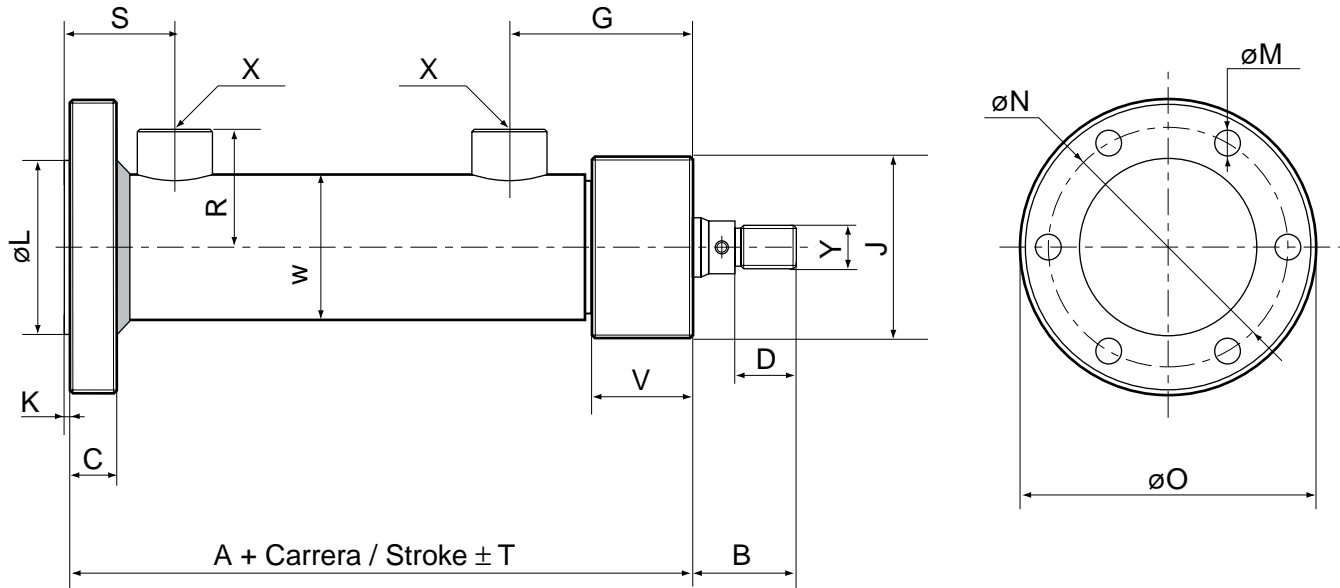

Nota: El cilindro serie: CS-250 lleva 12 taladros equidistantes (M) en vez de 6.

Note: The cylinder series: CS-250 carries 12 equidistant drills (M) instead of 6.

| TIPO CS | X | Y | A | B | C | D | G | J | K | L | M | N | O | R | S | T | V | W |
|---------|-----------------------------|----------|-----|-----|----|-----|-----|-----|---|-----|----|-----|-----|-----|-----|---|-----|-----|
| CS-032 | $\frac{016}{028}$ 1/4" G. | 12 x 125 | 108 | 30 | 10 | 16 | 50 | 52 | 2 | 52 | 7 | 67 | 80 | 35 | 30 | 2 | 32 | 42 |
| CS-040 | $\frac{022}{028}$ 3/8" G. | 16 x 150 | 133 | 35 | 13 | 20 | 62 | 62 | 2 | 60 | 9 | 82 | 100 | 41 | 34 | 2 | 40 | 50 |
| CS-050 | $\frac{028}{036}$ 3/8" G. | 20 x 150 | 142 | 41 | 15 | 25 | 64 | 74 | 2 | 75 | 11 | 103 | 125 | 46 | 37 | 2 | 41 | 60 |
| CS-063 | $\frac{036}{045}$ 1/2" G. | 27 x 2 | 155 | 48 | 18 | 32 | 64 | 89 | 2 | 90 | 13 | 120 | 145 | 54 | 43 | 2 | 39 | 75 |
| CS-080 | $\frac{045}{056}$ 1/2" G. | 33 x 2 | 178 | 59 | 22 | 40 | 74 | 112 | 2 | 110 | 15 | 142 | 170 | 65 | 52 | 2 | 46 | 95 |
| CS-100 | $\frac{056}{070}$ 3/4" G. | 42 x 2 | 197 | 70 | 25 | 50 | 84 | 135 | 3 | 135 | 17 | 170 | 202 | 76 | 56 | 3 | 52 | 115 |
| CS-125 | $\frac{070}{090}$ 3/4" G. | 52 x 2 | 211 | 80 | 30 | 55 | 88 | 170 | 3 | 168 | 21 | 210 | 250 | 91 | 68 | 3 | 53 | 145 |
| CS-160 | $\frac{090}{110}$ 1" G. | 68 x 3 | 263 | 100 | 38 | 70 | 112 | 218 | 3 | 215 | 29 | 270 | 320 | 116 | 83 | 3 | 67 | 185 |
| CS-200 | $\frac{110}{140}$ 1 1/4" G. | 90 x 3 | 306 | 125 | 42 | 90 | 127 | 272 | 3 | 270 | 32 | 330 | 385 | 138 | 102 | 3 | 80 | 230 |
| CS-250 | $\frac{140}{180}$ 1 1/4" G. | 110 x 3 | 345 | 150 | 55 | 110 | 155 | 335 | 5 | 330 | 29 | 390 | 440 | 172 | 115 | 4 | 105 | 298 |

CILCOIL, S.A. - se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.

CILCOIL, S.A. - reserves the rights to modify: Techniques, materials, dimensions and shapes without prior notice.