




• **TIPO - TYPE: FS** •

Muñones intermedios - Intermediate trunion mounting

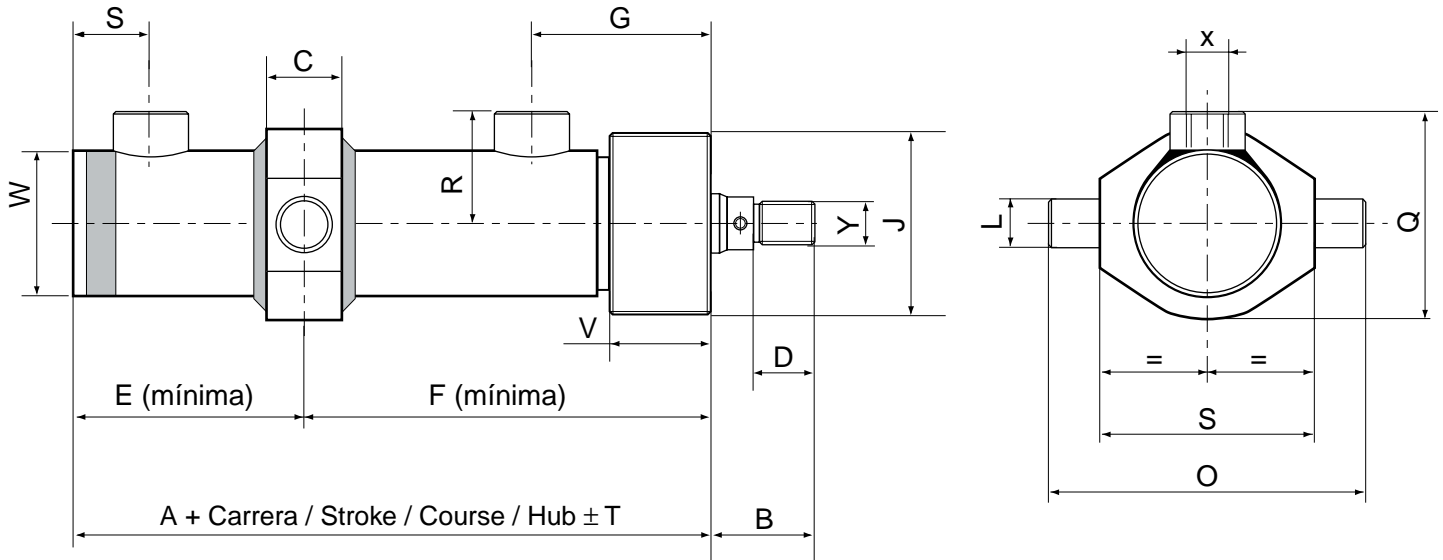

DIAMETRO CILINDRO CYLINDER DIAMETER		032	040	050	063	080	100	125	160	200	250									
Carrera mínima Min stroke		36	41	39	44	42	56	72	85	112	134									
TIPO CS	X	Y	A	B	C	D	E	F	G	J	K	L	O	Q	R	S	T	V	W	
CS-032	$\frac{016}{016}$ 1/4" G.	12x125	106	30	20	16	59	83	50	52	56	16	80	54	35	26	2	32	42	
CS-040	$\frac{022}{028}$ 3/8" G.	16x150	126	35	24	20	63	100	62	62	70	20	102	65	41	25	2	40	50	
CS-050	$\frac{028}{036}$ 3/8" G.	20x150	136	41	30	25	70	105	64	74	85	25	125	80	46	29	2	41	60	
CS-063	$\frac{036}{045}$ 1/2" G.	27 x 2	149	48	36	32	82	111	64	89	105	32	155	95	54	35	2	39	75	
CS-080	$\frac{045}{056}$ 1/2" G.	33 x 2	168	59	36	40	88	122	74	112	125	32	175	120	65	40	2	46	95	
CS-100	$\frac{056}{070}$ 3/4" G.	42 x 2	189	70	45	50	103	142	84	135	156	40	220	145	76	45	3	52	115	
CS-125	$\frac{070}{090}$ 3/4" G.	52 x 2	203	80	55	55	118	150	88	170	190	50	270	174	91	57	3	53	145	
CS-160	$\frac{090}{110}$ 1" G.	68 x 3	255	100	70	70	146	187	112	218	250	63	350	236	116	72	3	67	185	
CS-200	$\frac{110}{140}$ 1 1/4" G.	90 x 3	297	125	90	90	178	223	127	272	300	80	426	290	138	90	3	80	230	
CS-250	$\frac{140}{180}$ 1 1/4" G.	110 x 3	338	150	110	110	210	257	155	335	360	100	520	345	172	103	4	105	298	

CILCOIL, S.A. - se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.

CILCOIL, S.A. - reserves the rights to modify: Techniques, materials, dimensions and shapes without prior notice.