




• **TIPO - TYPE: FD** •

Muñones intermedios - Intermediate trunion mounting
Cilindro de doble vástago - Double rod cylinder

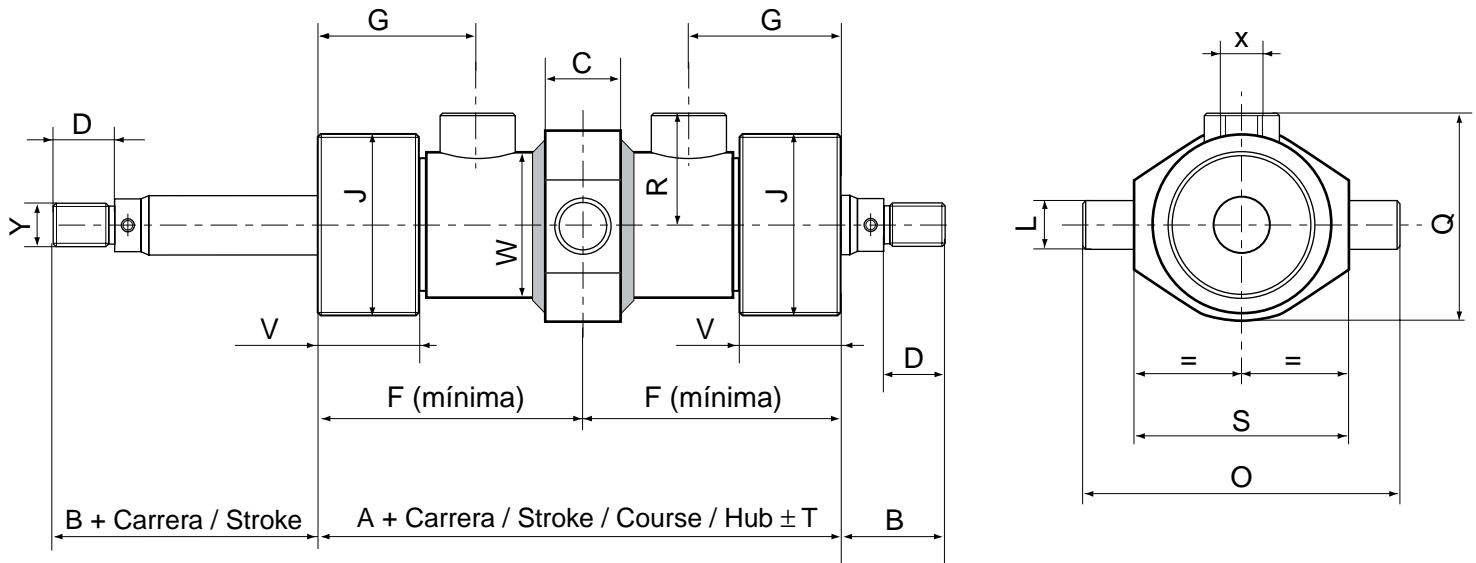

DIAMETRO CILINDRO		032	040	050	063	080	100	125	160	200	250							
Carrera mínima		37	41	52	52	54	72	84	103	128	149							
TIPO CS		X	Y	A	B	C	D	F	G	J	K	L	O	Q	R	T	V	W
CS-032	016	1/4" G.	12x125	129	30	20	16	83	50	52	56	16	80	54	35	2	32	42
CS-040	022 028	3/8" G.	16x150	159	35	24	20	100	62	62	70	20	102	65	41	2	40	50
CS-050	028 036	3/8" G.	20x150	168	41	30	25	105	64	74	85	25	125	80	46	2	41	60
CS-063	036 045	1/2" G.	27x2	170	48	36	32	111	64	89	105	32	155	95	54	2	39	75
CS-080	045 056	1/2" G.	33x2	190	59	36	40	122	74	112	125	32	175	120	65	2	46	95
CS-100	056 070	3/4" G.	42x2	212	70	45	50	142	84	135	156	40	220	145	76	3	52	115
CS-125	070 090	3/4" G.	52x2	222	80	55	55	150	88	170	190	50	270	174	91	3	53	145
CS-160	090 110	1" G.	68x3	277	100	68	70	187	112	218	250	63	350	236	116	3	67	185
CS-200	110 140	1 1/4" G.	90x3	318	125	90	90	223	127	272	300	80	426	290	138	3	80	230
CS-250	140 180	1 1/4" G.	110x3	375	150	110	110	257	155	335	360	100	520	345	172	4	105	298

CILCOIL, S.A. - se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.

CILCOIL, S.A. - reserves the rights to modify: Techniques, materials, dimensions and shapes without prior notice.