




• **TIPO - TYPE: FD** •

**Muñones intermedios - Intermediate trunion mounting**  
**Cilindro de doble vástago - Double rod cylinder**

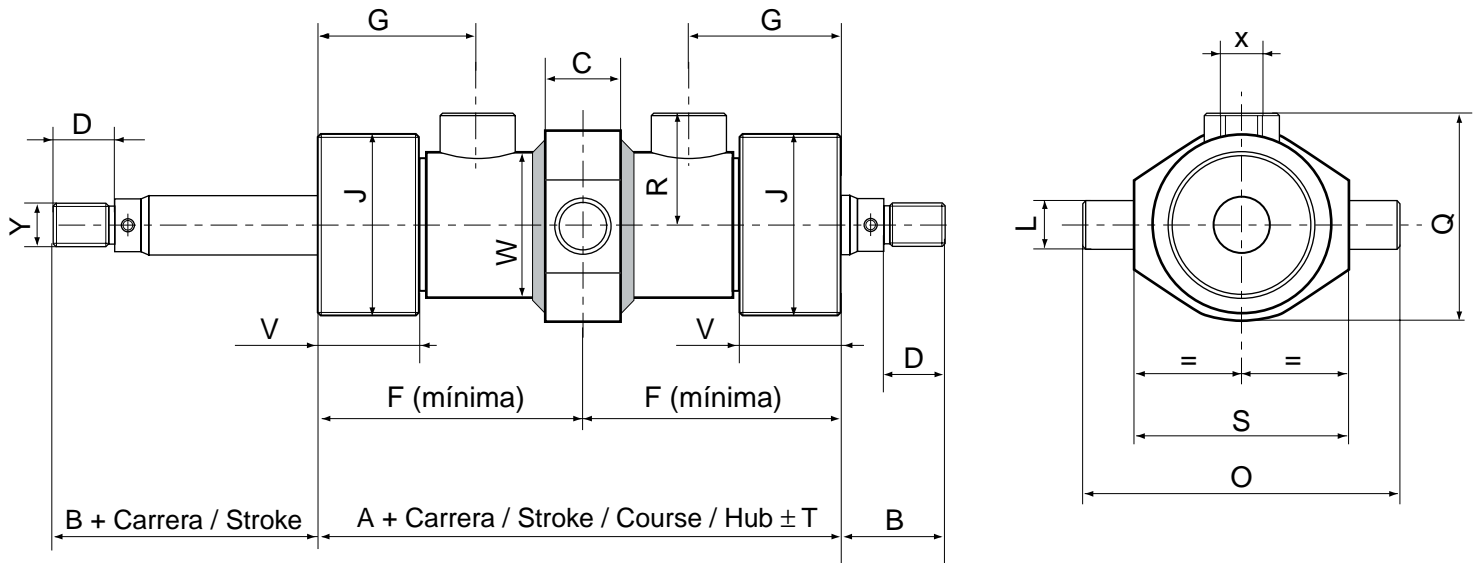

<b>DIAMETRO CILINDRO</b>		032	040	050	063	080	100	125	160	200	250							
<b>Carrera mínima</b>		37	41	52	52	54	72	84	103	128	149							
<b>TIPO CS</b>	<b>X</b>	<b>Y</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>F</b>	<b>G</b>	<b>J</b>	<b>K</b>	<b>L</b>	<b>O</b>	<b>Q</b>	<b>R</b>	<b>T</b>	<b>V</b>	<b>W</b>	
<b>CS-032</b>	$\frac{016}{016}$	1/4" G.	12x125	129	30	20	16	83	50	52	56	16	80	54	35	2	32	42
<b>CS-040</b>	$\frac{022}{028}$	3/8" G.	16x150	159	35	24	20	100	62	62	70	20	102	65	41	2	40	50
<b>CS-050</b>	$\frac{028}{036}$	3/8" G.	20x150	168	41	30	25	105	64	74	85	25	125	80	46	2	41	60
<b>CS-063</b>	$\frac{036}{045}$	1/2" G.	27x2	170	48	36	32	111	64	89	105	32	155	95	54	2	39	75
<b>CS-080</b>	$\frac{045}{056}$	1/2" G.	33x2	190	59	36	40	122	74	112	125	32	175	120	65	2	46	95
<b>CS-100</b>	$\frac{056}{070}$	3/4" G.	42x2	212	70	45	50	142	84	135	156	40	220	145	76	3	52	115
<b>CS-125</b>	$\frac{070}{090}$	3/4" G.	52x2	222	80	55	55	150	88	170	190	50	270	174	91	3	53	145
<b>CS-160</b>	$\frac{090}{110}$	1" G.	68x3	277	100	68	70	187	112	218	250	63	350	236	116	3	67	185
<b>CS-200</b>	$\frac{110}{140}$	1 1/4" G.	90x3	318	125	90	90	223	127	272	300	80	426	290	138	3	80	230
<b>CS-250</b>	$\frac{140}{180}$	1 1/4" G.	110x3	375	150	110	110	257	155	335	360	100	520	345	172	4	105	298

CILCOIL, S.A. - se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.

CILCOIL, S.A. - reserves the rights to modify: Techniques, materials, dimensions and shapes without prior notice.