




• TIPO - TYPE: ES - MS2 •

PATAS
FOOT MOUNTING

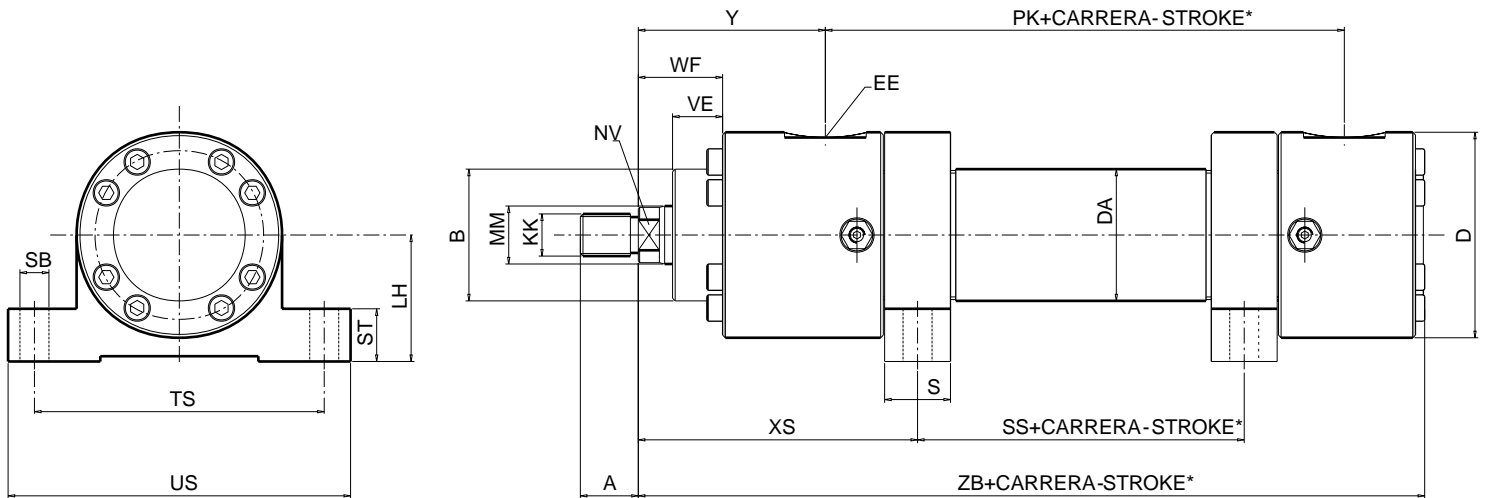

* La carrera mínima según cilindro es X

* The minimum stroke according to cylinder is X

PISTON BORE	MM	A	B _{f8}	D	DA	EE	KK	LH _{h10}	NV	PJ	S	SB _{H13}	SS	ST	TS _{js13}	US	VE	WF	XS	Y	ZB	X
25	14	16	32	56	35	1/4"G	M12x1.25	32	12	77	20	9	19	20	75	92	15	28	87	58	155	25
	18	M14x1.5					15															
32	18	18	40	67	42	3/8"G	M14x1.5	38	15	89	25	11	22	20	90	110	19	32	97,5	64	176	30
	22	M16x1.5					17															
40	22	22	50	78	50	1/2"G	M16x1.5	48	17	97	25	11	24	20	110	130	19	32	106	71	198	35
	28	M20x1.5					22															
50	28	28	60	95	60	1/2"G	M20x1.5	52	22	111	32	14	26	25	120	145	24	38	116	72	213	60
	36	M27x2					28															
63	36	36	70	116	75	3/4"G	M27x2	62	28	117	32	18	33	25	145	180	29	45	123	82	234	60
	45	M33x2					36															
80	45	45	85	130	95	3/4"G	M33x2	70	36	134	40	22	42	30	170	210	36	54	136	91	260	100
	56	M42x2					46															
100	56	56	106	158	115	1"G	M42x2	82	46	162	50	26	49	35	200	245	37	57	164	108	310	100
	70	M48x2					60															
125	70	63	132	192	145	1"G	M48x2	100	60	174	56	33	55	35	245	300	37	60	180	121	335	140
	90	M64x3					75															
160	90	85	160	232	185	1 1/4"G	M64x3	142	75	191	56	33	66	45	320	400	41	66	206	143	380	250
	110	M80x3					90															
200	110	95	200	285	230	1 1/4"G	M80x3	170	90	224	60	36	90	50	400	500	45	75	257	190	474	275
	140	M100x3					120															
250	140	112	250	365	298	1 1/2"G	M100x3	195	120	290	70	45	125	60	480	570	65	96	283	205	580	300
	180	M125x4					160															
320	180	125	320	450	368	1 1/2"G	M125x4	245	160	358	80	52	156	70	580	680	71	108	350	250	696	400
	220	M160x4					200															

CILCOIL, S.A. - se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.

CILCOIL, S.A. - reserves the rights to modify: Techniques, materials, dimensions and shapes without prior notice.

Volver
Series Fabricación

Volver
Página Principal

