




• TIPO - TYPE: ED •
PATAS - DOBLE VÁSTAGO
FOOT MOUNTING - DOUBLE ROD

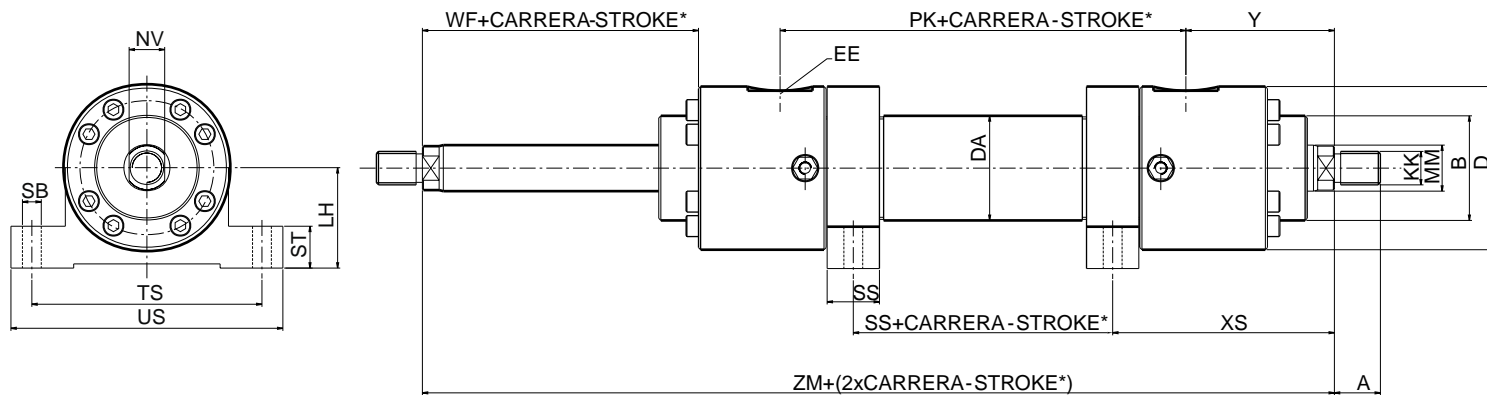

* La carrera mínima según cilindro es X

* The minimum stroke according to cylinder is X

PISTON BORE	MM	A	B _{f8}	D	DA	EE	KK	LH _{h10}	NV	PK	S	SB _{H13}	SS	ST	TS _{js13}	US	VE	WF	XS	Y	ZM	X
25	14	16	32	56	35	1/4"G	M12x1.25	32	12	77	20	9	19	20	75	92	15	28	87	58	193	25
	18	18					M14x1.5		15													
32	18	18	40	67	42	3/8"G	M14x1.5	38	15	89	25	11	22	20	90	110	19	32	97,5	64	217	30
	22	22					M16x1.5		17													
40	22	22	50	78	50	1/2"G	M16x1.5	48	17	94	25	11	24	20	110	130	19	32	106	71	236	35
	28	28					M20x1.5		22													
50	28	28	60	95	60	1/2"G	M20x1.5	52	22	114	32	14	26	25	120	145	24	38	116	72	258	60
	36	36					M27x2		28													
63	36	36	70	116	75	3/4"G	M27x2	62	28	115	32	18	33	25	145	180	29	45	123	82	279	60
	45	45					M33x2		36													
80	45	45	85	130	95	3/4"G	M33x2	70	36	132	40	22	42	30	170	210	36	54	136	91	314	100
	56	56					M42x2		46													
100	56	56	106	158	115	1"G	M42x2	82	46	161	50	26	49	35	200	245	37	57	164	108	377	100
	70	63					M48x2		60													
125	70	63	132	192	145	1"G	M48x2	100	60	173	56	33	55	35	245	300	37	60	180	121	415	140
	90	85					M64x3		75													
160	90	85	160	232	185	1 1/4"G	M64x3	142	75	192	56	33	66	45	320	400	41	66	206	143	478	250
	110	95					M80x3		90													
200	110	95	200	285	230	1 1/4"G	M80x3	170	90	224	60	36	90	50	400	500	45	75	257	190	604	275
	140	112					M100x3		120													
250	140	112	250	365	298	1 1/2"G	M100x3	195	120	281	70	45	125	60	480	570	65	96	283	205	691	300
	180	125					M125x4		160													
320	180	125	320	450	368	1 1/2"G	M125x4	245	160	356	80	52	156	70	580	680	71	108	350	250	856	400
	220	160					M160x4		200													

CILCOIL, S.A. - se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.

CILCOIL, S.A. - reserves the rights to modify: Techniques, materials, dimensions and shapes without prior notice.

Volver
Series Fabricación

Volver
Página Principal

