




• TIPO - TYPE: NS - MF1 •

BRIDA DELANTERA RECTANGULAR  
HEAD RECTANGULAR FLANGE MOUNTING

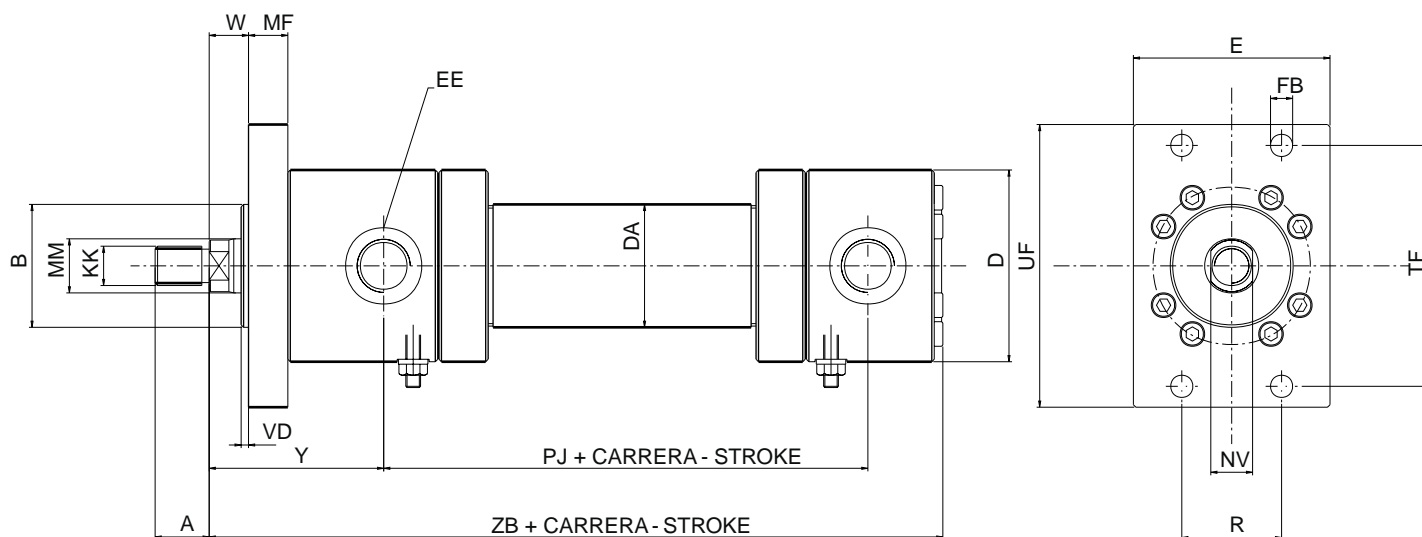

PISTON BORE	MM	A	B <sub>f8</sub>	D	DA	E	EE	FB <sub>H13</sub>	KK	MF	NV	PJ	R <sub>js13</sub>	TF <sub>js13</sub>	UF	VD	W	Y	ZB
25	14	16	32	56	35	60	1/4"G	6,6	M12x1.25	12	12	77	28,7	69,2	85	3	16	58	155
	18	18							M14x1.5		15								
32	18	18	40	67	42	70	3/8"G	9	M14x1.5	16	15	89	35,2	85	105	3	16	64	176
	22	22							M16x1.5		17								
40	22	22	50	78	50	80	1/2"G	9	M16x1.5	16	17	97	40,6	98	115	3	16	71	198
	28	28							M20x1.5		22								
50	28	28	60	95	60	100	1/2"G	11	M20x1.5	20	22	111	48,2	116,4	140	4	18	72	213
	36	36							M27x2		28								
63	36	36	70	116	75	120	3/4"G	13,5	M27x2	25	28	117	55,5	134	160	4	20	82	234
	45	45							M33x2		36								
80	45	45	85	130	95	135	3/4"G	17,5	M33x2	32	36	134	63,1	152,5	185	4	22	91	260
	56	56							M42x2		46								
100	56	56	106	158	115	160	1"G	22	M42x2	32	46	162	76,5	184,8	225	5	25	108	310
	70	63							M48x2		60								
125	70	63	132	192	145	195	1"G	22	M48x2	32	60	174	90,2	217,1	255	5	28	121	335
	90	85							M64x3		75								

CILCOIL, S.A. - se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.

CILCOIL, S.A. - reserves the rights to modify: Techniques, materials, dimensions and shapes without prior notice.

Volver  
Series Fabricación

Volver  
Página Principal

