




**Q** ISO MX 1

**TIRANTES PROLONGADOS AMBOS LADOS**  
EXT. FRONT AND REAR TIE-RODS

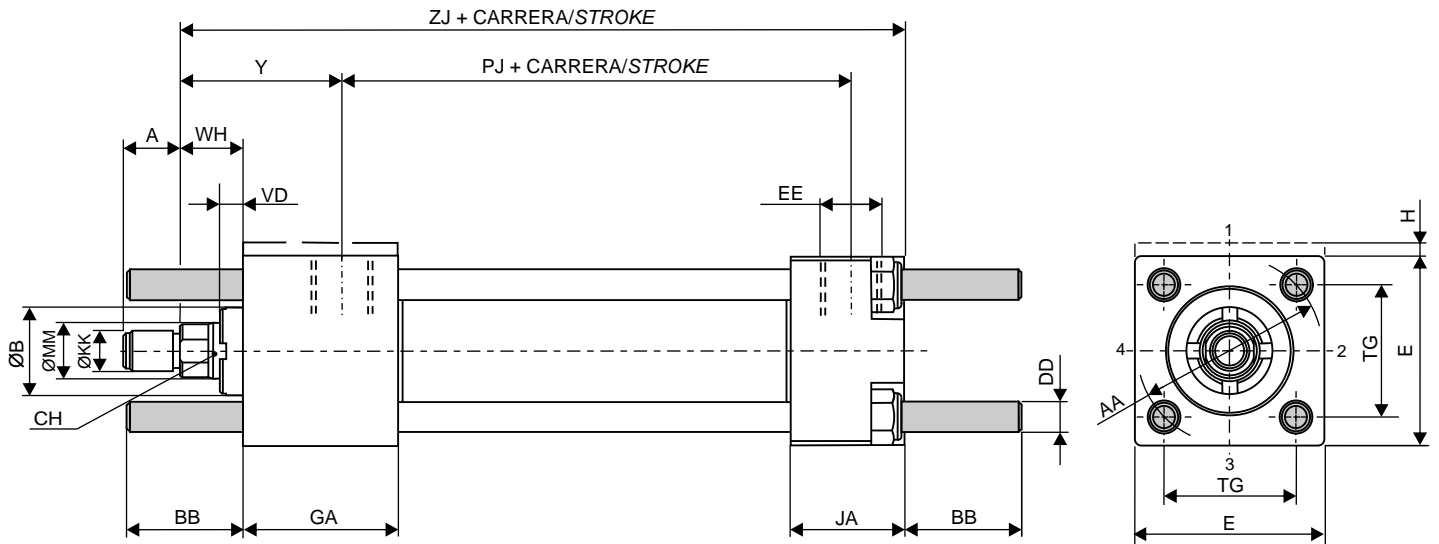

Posicion regulador amortiguacion, lado 3. Location of cushioning-screws, side 3.

Pistón Bore	25		32		40		50		63		80		100		125		160		200	
	MM																			
A h15	1	14	16	18	22	28	36	45	56	63	85	95	112	128	160	192	224	256	288	320
	2	18	22	28	36	45	56	63	85	95	112	128	160	192	224	256	288	320	352	384
AA		40	47	59	74	91	117	137	178	219	269	319	369	419	469	519	569	619	669	719
B f9		24   30	26   34	30   42	34   50	42   60	50   72	60   88	72   108	88   133	108   163	133   188	163   218	218   273	273   328	328   383	383   438	438   493	493   548	548   603
BB		19	24	35	46	46	59	59	81	92	115	126	150	161	185	196	220	231	255	266
CH		10   15	12   18	15   22	18   30	22   36	30   46	36   60	46   80	60   100	80   120	100   140	120   160	160   200	200   240	240   280	280   320	320   360	360   400	400   440
DD		M5x0,8	M6x1	M8x1	M12x1,25	M12x1,25	M16x1,5	M16x1,5	M22x1,5	M27x2	M30x2	M33x2	M42x2	M48x2	M56x2	M64x3	M72x2	M80x3	M90x3	M100x3
E		40	45	63	75	90	115	130	165	205	245	285	325	365	405	445	485	525	565	605
EE		1/4"G	1/4"G	3/8 "G	1/2"G	1/2"G	3/4"G	3/4"G	1"G	1"G	1 1/4"G	1 1/4"G	1 1/2"G	1 1/2"G	1 3/4"G	1 3/4"G	2"G	2"G	2 1/4"G	2 1/4"G
GA		50	50	55	61	61	70	72	80	83	101	104	112	115	123	126	134	137	145	148
H		5	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
JA		25	31	47	45	45	54	57	58	58	76	79	89	92	102	105	115	118	128	131
KK	1	M10x1,25	M12x1,25	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M64x3	M72x2	M80x3	M90x3	M100x3	M110x3	M120x3	M130x3	M140x3	M150x3
	2	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M64x3	M80x3	M100x3	M110x3	M120x3	M130x3	M140x3	M150x3	M160x3	M170x3	M180x3	M190x3
PJ ±1,25		53	56	73	74	80	93	101	117	130	165	173	180	203	216	232	245	261	274	290
TG		28,3	33,2	41,7	52,3	64,3	82,7	96,9	125,9	154,9	190,2	225,5	270,8	316,1	361,4	406,7	452,0	497,3	542,6	587,9
VD		6	12	12	9	13	9	10	10	7	7	7	7	7	7	7	7	7	7	7
WH		15	25	25	25	32	31	35	35	32	32	32	32	32	32	32	32	32	32	32
Y ±2		50	60	62	67	71	77	82	86	86	98	103	108	113	118	123	128	133	138	143
ZJ ±1		114	128	153	159	168	190	203	232	245	299	312	325	354	367	380	389	402	411	424

CILCOIL,S.A.- Se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.  
CILCOIL,S.A.- Reserves the rights to modify: Techniques, materials,dimensions and shapes without prior notice.