




R ISO MX 3

TIRANTES PROLONGADOS DELANTEROS
EXTENDED FRONT TIE-RODS

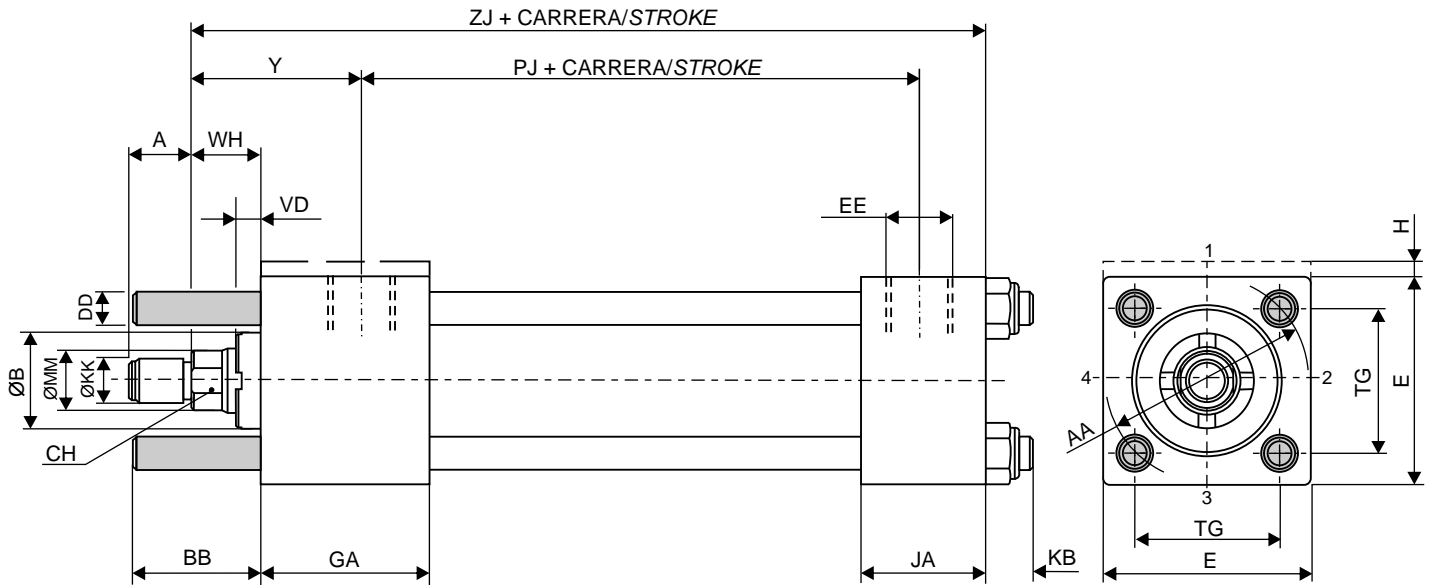

Posicion regulador amortiguacion, lado 3. Location of cushioning-screws, side 3.

Pistón Bore	25		32		40		50		63		80		100		125		160		200	
MM	12	18	14	22	18	28	22	36	28	45	36	56	45	70	56	90	70	110	90	140
A h15	1	14	16	18	22	28	36	45	56	63	85	112	140	165	205	245	299	354	419	494
A h15	2	18	22	28	36	45	56	63	85	95	112	140	165	205	245	299	354	419	494	588
AA	40	47	59	74	91	117	137	178	219	269	329	399	479	569	669	789	909	1029	1149	1269
B f9	24	30	26	34	30	42	34	50	42	60	50	72	60	88	72	108	88	133	108	163
BB	19	24	35	46	46	59	59	81	92	115	115	130	130	165	205	245	299	354	419	494
CH	10	15	12	18	15	22	18	30	22	36	30	46	36	60	46	80	60	100	80	120
DD	M5x0,8	M6x1	M8x1	M12x1,25	M12x1,25	M16x1,5	M16x1,5	M22x1,5	M27x2	M30x2	M36x2	M42x2	M48x2	M56x2	M66x2	M78x2	M90x2	M102x2	M114x2	M126x2
E	40	45	63	75	90	115	130	165	205	245	299	354	419	494	588	699	829	979	1149	1339
EE	1/4"G	1/4"G	3/8 "G	1/2"G	1/2"G	3/4"G	3/4"G	1"G	1"G	1 1/4"G	1 1/4"G	1 1/2"G	1 1/2"G	1 3/4"G	1 3/4"G	2"G	2"G	2 1/4"G	2 1/4"G	2 3/4"G
GA	50	50	55	61	61	70	72	80	83	101	101	117	117	130	130	145	145	165	165	185
H	5	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
JA	25	31	47	45	45	54	57	58	58	76	76	88	88	101	101	117	117	130	130	145
KB	7	8	10	14	14	19	19	25	32	35	35	41	41	45	45	51	51	58	58	65
KK	1	M10x1,25	M12x1,25	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M64x3	M80x3	M100x3	M126x3	M156x3	M196x3	M246x3	M306x3	M386x3	M486x3
KK	2	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M64x3	M80x3	M100x3	M126x3	M156x3	M196x3	M246x3	M306x3	M386x3	M486x3	M606x3	M756x3
PJ ±1,25	53	56	73	74	80	93	101	117	130	165	165	185	185	210	210	235	235	265	265	295
TG	28,3	33,2	41,7	52,3	64,3	82,7	96,9	125,9	154,9	190,2	190,2	219,2	219,2	254,2	254,2	289,2	289,2	329,2	329,2	369,2
VD	6	12	12	9	13	9	10	10	7	7	7	7	7	7	7	7	7	7	7	7
WH	15	25	25	25	32	31	35	35	32	32	32	32	32	32	32	32	32	32	32	32
Y ±2	50	60	62	67	71	77	82	86	86	98	98	112	112	125	125	138	138	152	152	165
ZJ ±1	114	128	153	159	168	190	203	232	245	299	299	339	339	389	389	449	449	509	509	569

CILCOIL,S.A.- Se reserva el derecho de modificar: Técnica, material, cotas y formas sin previo aviso.
CILCOIL,S.A.- Reserves the rights to modify: Techniques, materials,dimensions and shapes without prior notice.